




# JAUNTY-FABRICATOR ENT.IND.CO.,LTD

## CHARGE STATION & SYNC

IP Control Screen

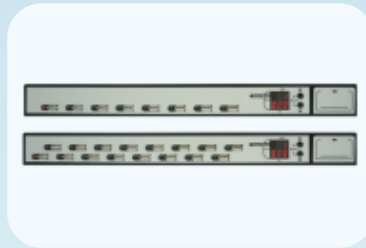

# Multi-charging and Sync station

## 1U station series



JF-SC1U-16



JF-SC1U-20



JF-SEME1U-20



JF-SSME1U-10



JF-SCMD1U-10



## Shelf series

JF-SCF-16



## Desktop series

JF-SCK-16




| Item No.      | Capacity | Power | Current rate (per port)         | Output connector | Function |      |                 |                   | Product dimension (mm) | Weight (kgs) |
|---------------|----------|-------|---------------------------------|------------------|----------|------|-----------------|-------------------|------------------------|--------------|
|               |          |       |                                 |                  | Charge   | Sync | Current display | Monitoring screen |                        |              |
| JF-SC1U-16    | 16       | 300W  | 2.5A/5V                         | USB type-A       | ●        | ●    | ●               | optional          |                        | 3            |
| JF-SC1U-20    | 20       | 350W  | 2.5A/5V                         | USB type-A       | ●        | ●    | ●               | optional          |                        | 3            |
| JF-SSME-1U-10 | 10       | 350W  | 3.0A / 19V                      | DC Jack          | ●        |      | ●               | optional          | W440*D190*H44          | 3            |
| JF-SCMD-1U-10 | 10       | 350W  | 2.5A / 5~20V / Max 40W per port | USB type-C       | ●        |      | ●               | optional          |                        | 3.1          |
| JF-SEME-1U-20 | 20       | 350W  | 2.5A/5V                         | USB type-A       | ●        |      |                 |                   |                        | 3.3          |
| JF-SCF-16     | 16       | 350W  | 2.5A/5V                         | USB type-A       | ●        | ●    | ●               | optional          | W440*D200*H245         | 4.8          |
| JF-SCK-16     | 16       | 350W  | 2.5A/5V                         | USB type-A       | ●        | ●    | ●               | optional          | W510*D370*H380         | 15           |

# Charging cart series

For Chromebook, multiple Surface Pro, notebook

JF-SSME32  
JF-SCMD32

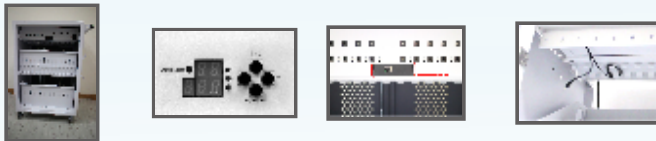

For tablet & mobile phone

JF-TSCK-32 / 48



Stack up system  
Modularized design

| Item No.   | Capacity | Power  | Current rate (per port)         | Output connector | Function |      |                 |                   | Product dimension (mm) | Weight (kgs) |
|------------|----------|--------|---------------------------------|------------------|----------|------|-----------------|-------------------|------------------------|--------------|
|            |          |        |                                 |                  | Charge   | Sync | Current display | Monitoring screen |                        |              |
| JF-SSME-32 | 32       | 1400W  | 3.0A / 19V                      | DC Jack          | ●        |      | ●               | optional          | W747*D560*H1034        | 75           |
| JF-SCMD-32 | 32       | 1400W  | 2.5A / 5~20V / Max 40W per port | USB type-C       | ●        |      | ●               | optional          | W747*D560*H1034        | 75           |
| JF-TSCK-48 | up to 48 | 350W*3 | 2.5A/5V                         | USB type-A       | ●        | ●    | ●               | optional          | W440*D190*H44          | 52           |

# Portable USB charging suitcase

JF-SCWP20



Ventilation

current display



|                 |                                  |
|-----------------|----------------------------------|
| Device capacity | 20                               |
| Function        | Charging & Sync                  |
| Output voltage  | USB type-A, DC 5V, 2.5A per port |
| Dimension       | W440*D640*H340mm                 |
| Slot dimension  | W260*D310*H25mm                  |
| Weight (net)    | 12.5 kgs                         |
| Waterproof rate | IP67                             |

# Save your wall plugs!! We can solve problems of not enough sockets for all your smart devices in your house or office.

- Group power management processing
- Diagnosing the quality of batteries and wires via its current display.
- Real - time numerical analysis of power consumption.
- Strong backstage to process the data management and extend to more peripheral effect.



**Remote Control**  
-Wifi remote control  
-Each IP control module



**Security**  
-Thermos sensor spec-in  
-Overheat and overload protection  
-Short circuit protection



**Plug & Display**  
-Plug the charging devices by USB connectors



**Flexible & Integration**  
Modularized and Casket  
Flexibility to choose each factor to assembly and integration



**Dynamic Report**  
-Real - time report charging condition



**Economic**  
-Measuring and calculating power consumption



**Operating system**  
iOS(Apple) & Android



**Intelligent**  
-Charging with Dynamic Smart Power (DSP) technology  
-Auto detect and feeding the hunger devices



**LED current display**  
-Switching and displaying each device charging current value



**Detectable**  
-Detecting battery cell condition  
-LED light showing if it's disconnected, fast or slow charging

## Charge Station Control Screen by IP Our excellent power solutions make your work efficiently



JAUNTY-FABRICATOR ENT.IND.CO.,LTD  
NO.8, Lane 8,Sec. 1,Chengtai Rd., Wugu dist.,  
New Taipei City, 248, Taiwan, R.O.C.  
Tel : +886-2-22960531 Fax : +886-2-2296-0532  
Email : alex@datarack.com.tw  
www.datarack.com.tw